













Item 名称	Specification 规格
Clear-span width 篷房跨度	30m/40m/50m
Eave height 屋檐高度	4m
Ridge height 屋脊高度	8.8m/10.3m/12.0m
Roof pitch 屋面坡度	18°
Bay distance 单元间距	5m
Longest component 最长部件	10.5m
Minimum tent length 最少起订	30m
Roof fixing 屋面固定	No limit 没有限制
Roof fixing 屋面固定	Bar tensioning 拉紧器
Main profile 主型材	350x125x6mm
Max. allowed wind speed 最高承受抗风	100km/hour 0.5kn/m <sup>2</sup>
Eave/Ridge connection 屋檐/屋脊连接角	Hot-dip Galvanized steel insert 镀锌钢铁
Framework material 框架材料	Hard pressed extruded Aluminium 6061-T6 硬挤压铝合金 6061-T6 (13HW)
Cover material 屋面材料	Waterproof, fireproof (DIN4012 B1, M2), UVresistant 700-900g/m <sup>2</sup> 防腐、防毒、抗紫外线、阻燃 (M2和B1) 等性能达到国际标准



Framework main profile dimension and use  
框架主型材尺寸及使用

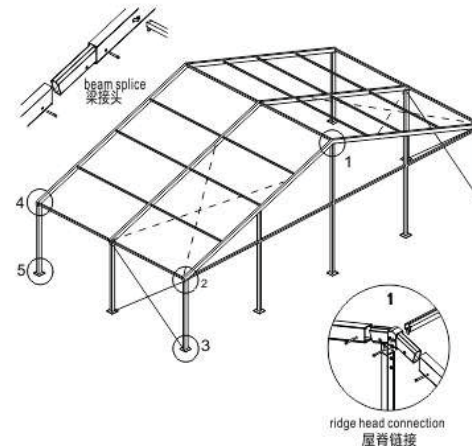

Optional accessories

- PVC window sidewalls
- Glass door units
- Anchoring
- Transparent PVC cover and sidewall
- Rain Gutter
- Flooring system
- Lining and curtain
- Weight plate
- Hard walling system
- Glass walling system
- PVC侧边围布
- 玻璃门
- 膨胀螺丝
- 透明PVC墙和墙壁
- 雨水槽
- 地台
- 窗帘和围幔
- 称重盘
- 硬体墙系统
- 玻璃墙系统

